

Fitting

The Ladderfix Microlite is a class one ladder stand off suitable for use with all popular patterns of ladder (**except C section ladders**) which are properly erected On firm level ground or with a proper safety base.

Fit the Microlite while the **ladder is on the ground**.


Feed the ladder through the Microlite.

Engage hooks over two rungs. See erection pages 6 and 7 for the correct rung positions.

The 80mm lower hook allows the Microlite to fit rung pitches from **250mm to 290mm**. The position of the rung on the hook will vary according to the rung pitch.

Engage spring clips under the lower of the two rungs. Attach with the back of the clips facing out to ensure that springs do not get knocked off.

Working above 10 metres. The Microlite should be secured with a ratchet strap when accessing a roof above 10 metres. Wrap the strap around the lower rung and the lower back bar of the Microlite. Tighten to secure.

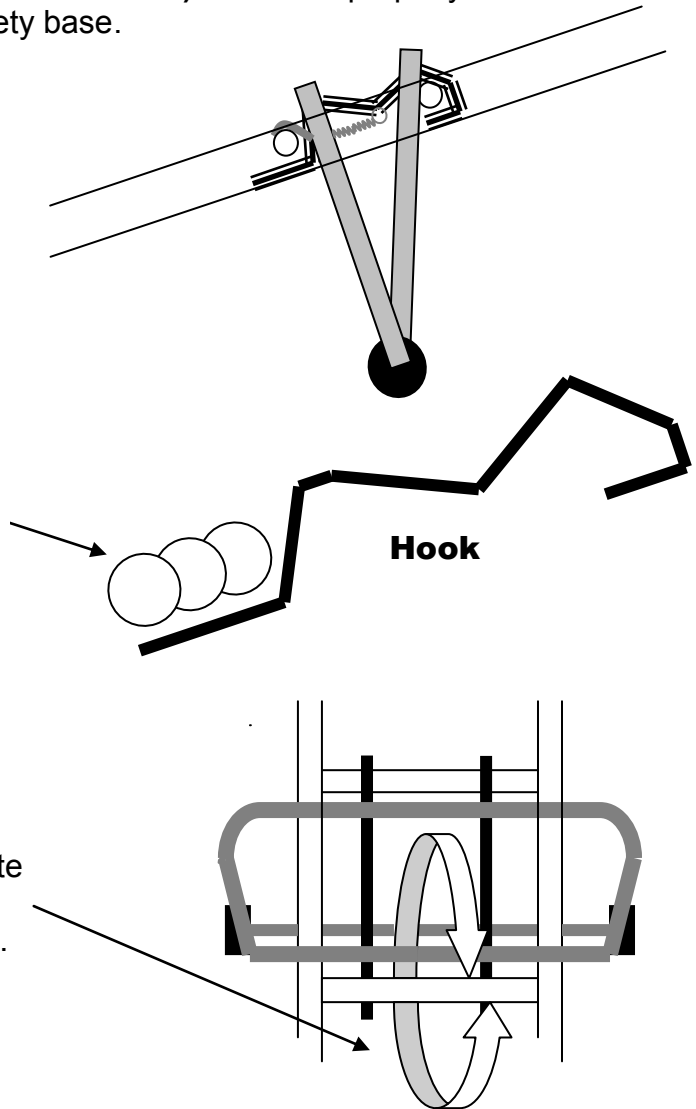

Important

Spring adjustment

There **are two settings** for the spring assembly. Choose the one that gives positive grip with the least tension.

1. Position spring here for ladder rung pitches under 270mm



2. Position spring here for ladder rung pitches over 270mm

